




**-Stops Heat **COLD!**-**



Extremely durable under the toughest conditions!

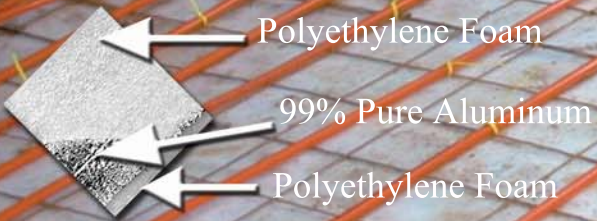

*If you haven't used Slab-Shield™, now's the time. With our new "Slab Tab" the same great product is now even easier to install.*



Members:



**BENEFITS OF LOW-E SLAB SHIELD:**

- DECREASES SLAB RESPONSE TIME
- EXCELLENT VAPOR BARRIER
- REDUCES LABOR TIME
- NOW WITH INTERLOCKING TABS
- CONVENIENT & LIGHTWIEGHT ROLLS
- PUNCTURE RESISTANCE OF 93 PSI
- CRUSH RESISTANCE OF 70 PSI (1/2")
- CLOSED CELL FOAM (NOT BUBBLE PACKAGING)
- 1/2" & 3/8" THICKNESSES AVAILABLE





**Environmentally Safe Products Inc.**  
 313 West Golden Ln. New Oxford, PA 17350  
 Phone: 800-289-5693 Fax: (717)-624-7089  
 E-Mail sales@low-e.com Web: www.low-e.com

Patent Pending  
**Slab-Shield™ Product Information**

Manufactured by Environmentally Safe Products

**Product Identification:**

Product Name: *Slab-Shield™*  
 Product Code: (1/2") S4000-T & (3/8") SE400-T

**Other Information:**

Finished Dimension: 1/2" = .45" - .50" Thickness, 48" Width, 63' Length(standard)  
 3/8" = .325" - .375" Thickness, 48" Width, 63' Length(standard) Shipped in roll form

Facings: Polyethylene  
 Center: 99.4% Polished Aluminum / PE foam laminate to both exterior surfaces  
 Perm Rating: (based on 1/4" Low-E double sided) .008  
 Flame & Smoke: Not Applicable in this type installation  
 R-Value: \*ASTM C 518-98: 2.9  
 Puncture Resistance: Beach Puncture T-803-99: 92.9 psi

\*Tested within concrete assembly

**Warning:** Although ESP Low-E™ Insulation Products are all ASTM fire tested and have excellent fire ratings; it is recommended that they or any insulation material should not be exposed to open flame or other ignition sources of sufficient intensity during shipment, storage or installation.



**Dealer Information**



#8036